



**NT-JC-S05-16 TENSION/COMPRESSION**  
**0..5kg - 0..50kg**

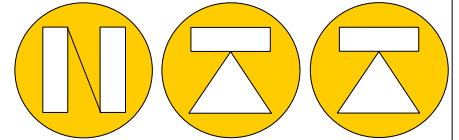


**NORDIC TRANSDUCER**

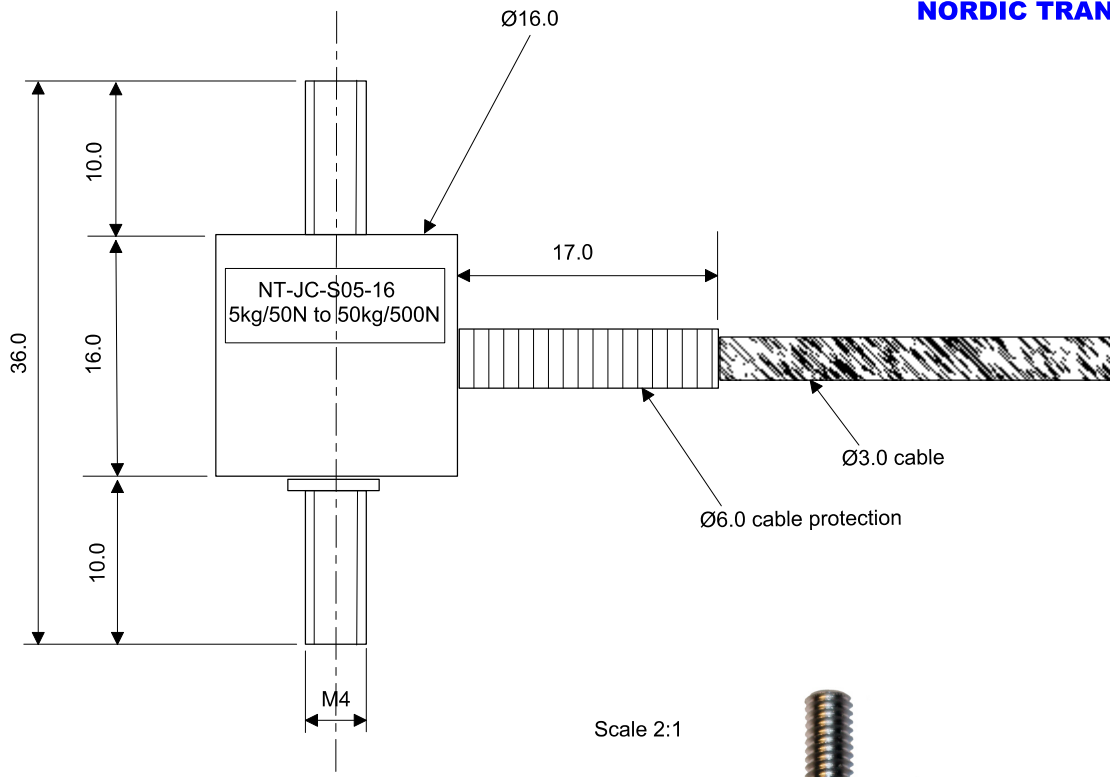

**Cable Color**  
 +Exc.: Red  
 - Exc.: Black  
 + Signal: Green  
 -Signal: White  
 Shield: Yellow

**NT-JC-S05-16**

Nominal Load: 5kg, 10kg, 50kg / 49N,98N, 490N  
 Nominal Sensitivity: 1...2mV/V  
 Input Resistance: 350 Ohm +/-5  
 Output Resistance: 350 Ohm +/-5  
 Supply Voltage: Recommended 2..5V Max.-10 Volt  
 Combined error: +/-0,4% F.S.  
 Max. side load: 50%  
 Max. Dynamic Load: 50%  
 Protection Class: IP65  
 Material : Stainless Steel  
 Weight: Load cell 16g with cable 64g  
 Cable: Ø3mm x 3m  
 Safe Overload: 120% F.S.  
 Natural Frequency: >2kHz

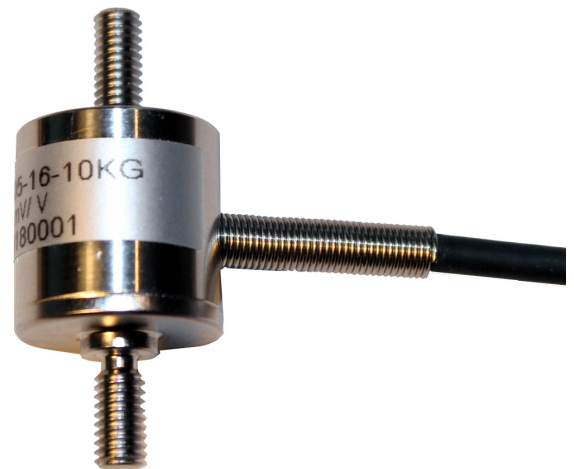

(Verwendungsbereich)		(Zul. Abw.)	(Oberfl.)	Maßstab	(Gewicht) 64g
				(Werkstoff, Halbzeug) Stainless Stell (Rohteil-Nr) (Modell- oder Gesenk-Nr)	
		Datum	Name	<b>NT-JC-S05-16</b> <b>Mini Tension Load Cell</b>  <b>Nordic Transducer</b>	
	Bearb.	12.11.18	KKD		
	Gepr.	00.00.00	XXX		
	Norm				
		<a href="http://www.ntt.dk">www.ntt.dk</a> <a href="mailto:ntt@ntt.dk">ntt@ntt.dk</a>		Blätter	
Zust.	Änderung	Datum	Name	Revision: 12.11.2018-01	Ersatz für:      Ersatz durch: